



TEE TEST POINT


(ABS023-TP - 25mm)

Used when the system has to be periodically tested. The capillary Tee piece is installed in the pipe run at the easily accessible position. It has a removable protection cap which fits over the nylon tubing when the system is being used normally. When testing is required simply remove the protective cap, test and replace once completed.

Installation Instructions:

Use the correct solvent Plusbond 3019.
 Do not paint.
 Keep pipe clean and free from dust.
 Do not install in direct sunlight.
 Only install with approved pipe.
 Do not use solvents to clean, only soapy water.

Part No. ABS023-TP - 25mm
Fitting color GREY
Diameter Tolerance +/- 0.15mm

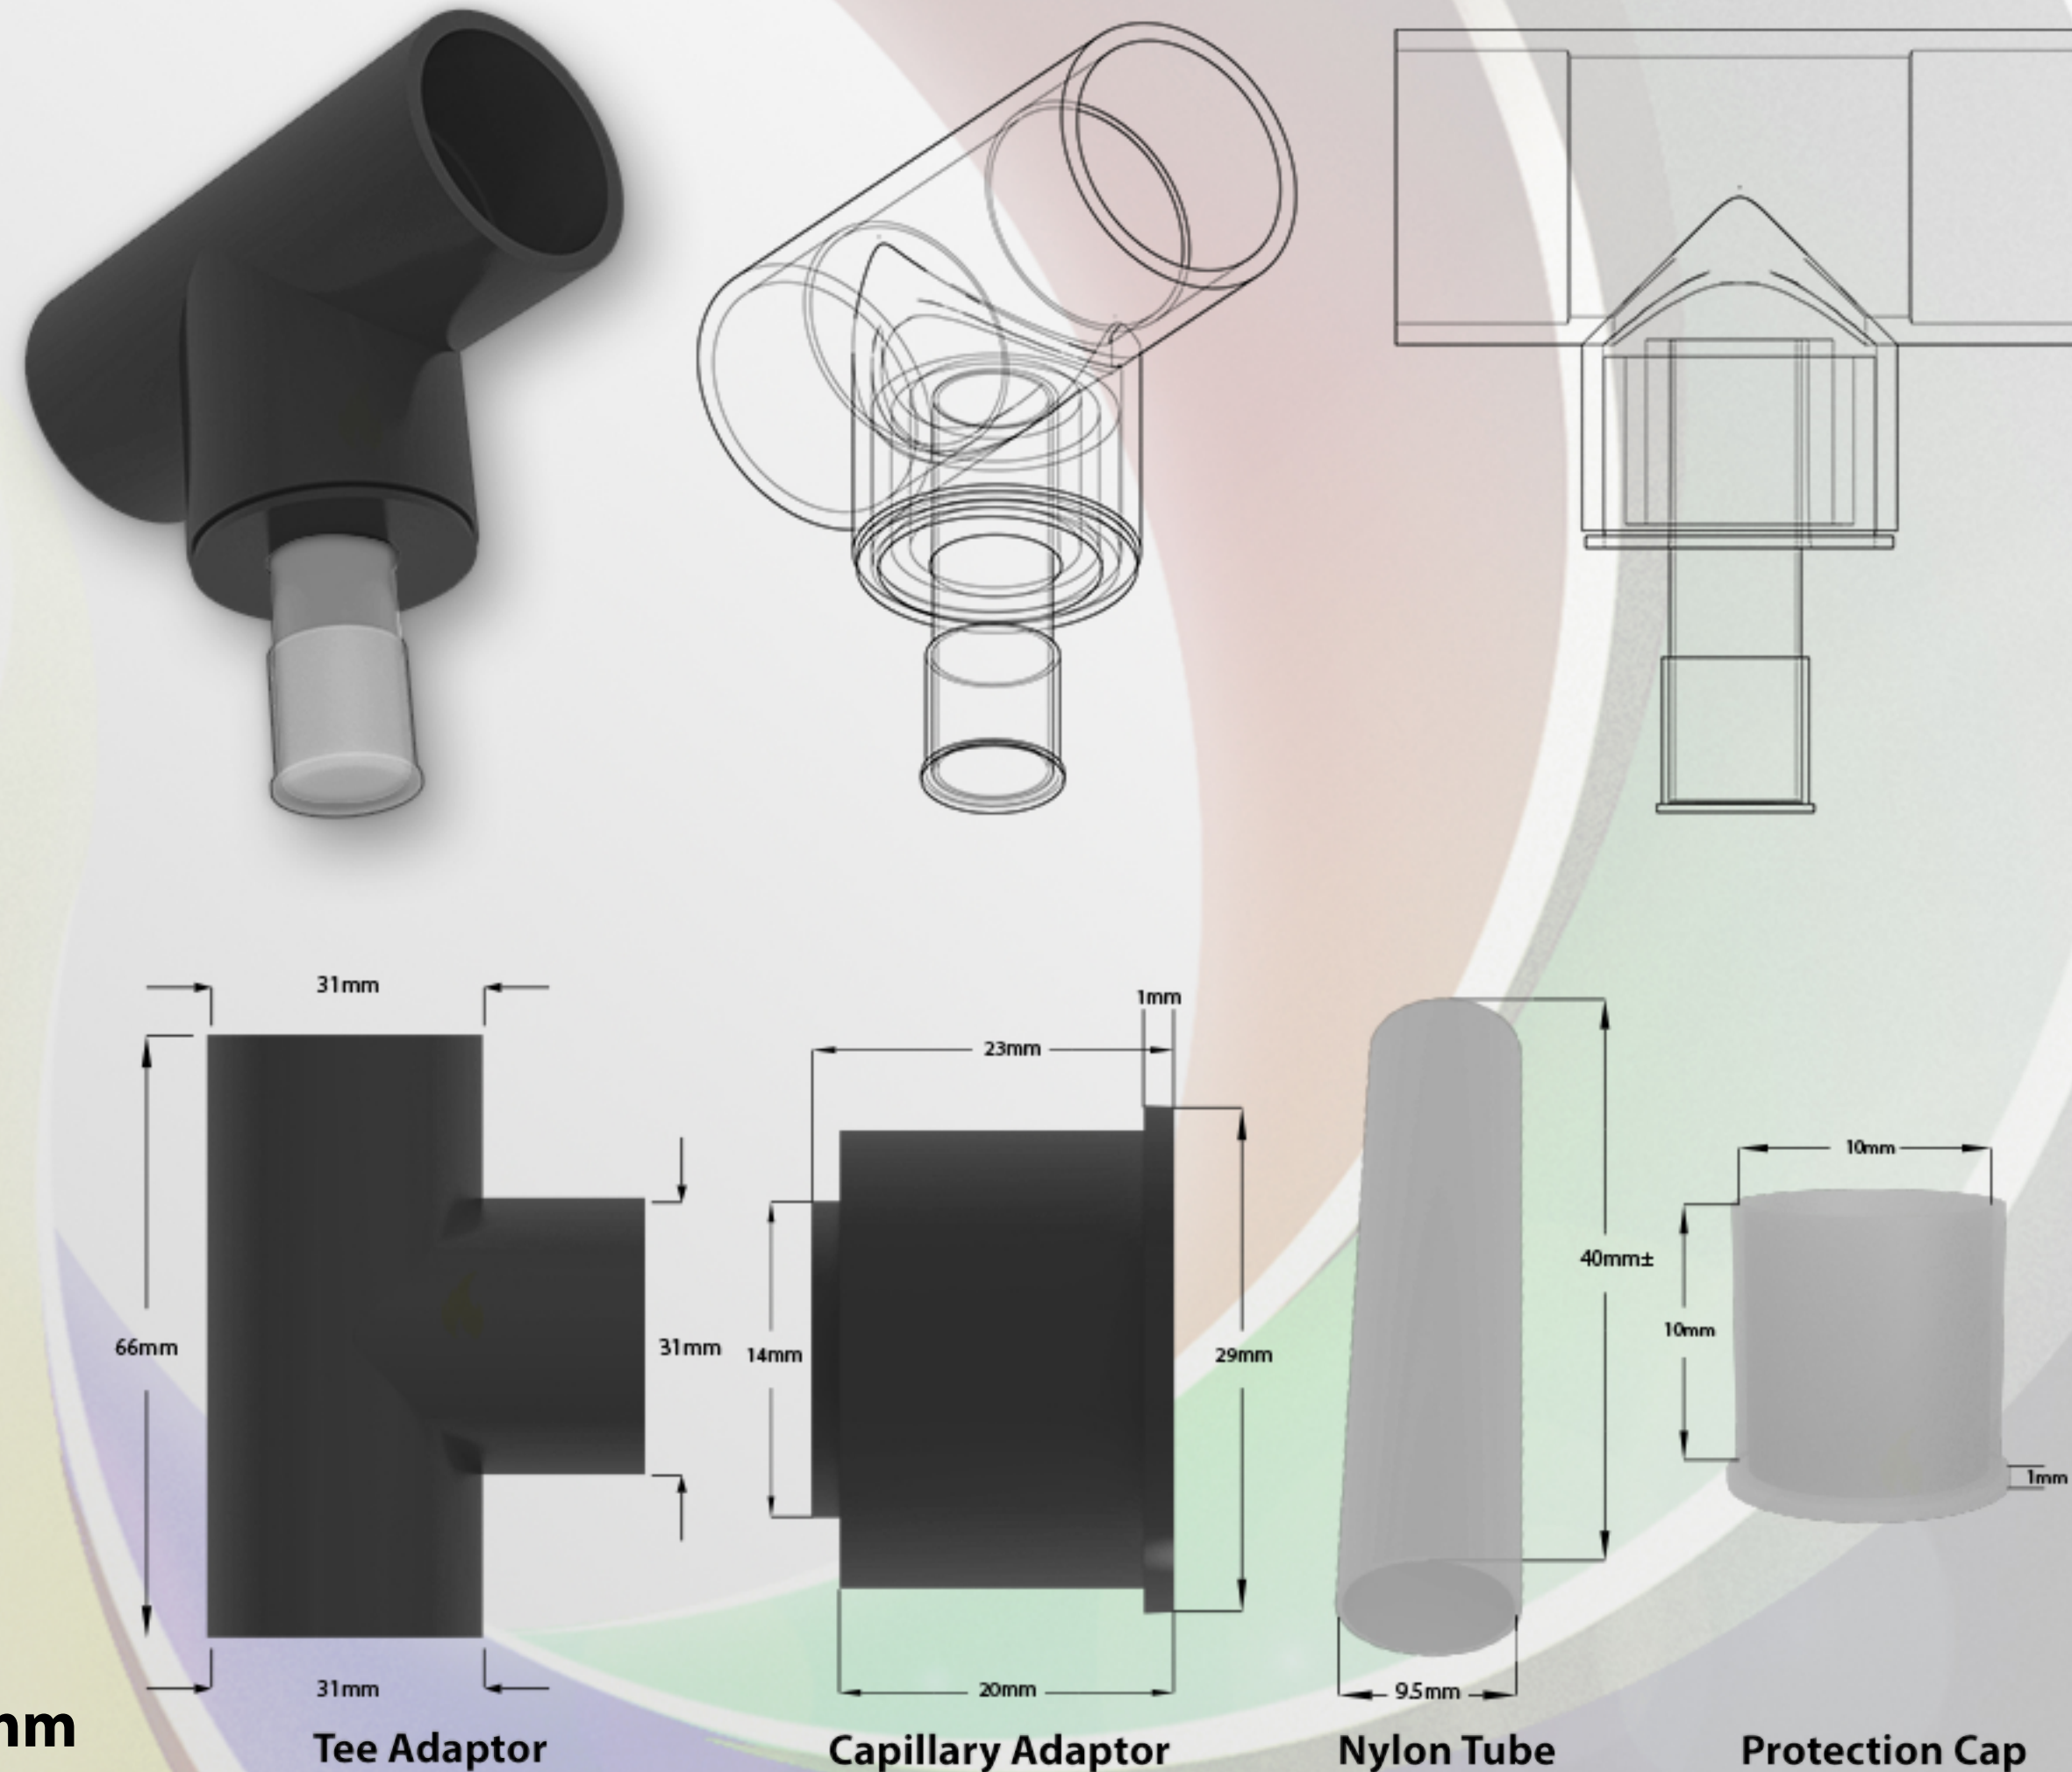

RAW MATERIAL DATA

Kumho ABS 750
 Acrylonitrile Butadiene Styrene

Physical:

Specific Gravity 1.04
 Test Method ASTM D792

Melt Mass - Flow Rate (MFR)

200°C/21.6 kg 47 g/10 min
 200°C/5.0 kg 4.1 g/10 min
 220°C/10.0 kg 34 g/10 min
 Test Method ASTM D1238

Molding Shrinkage -

Flow 0.0040 to 0.0070 in/in
 Test Method ASTM D955

Mechanical:

Tensile Strength
 Yield, 73°F (23°C)
 1.97 in (50.0mm)
 6670 psi
 Test Method ASTM D638

Tensile Elongation

Yield, 73°F (23°C)
 1.97 in (50.0 mm), 15%
 Test Method ASTM D638

Flexural Modulus

Yield, 73°F (23°C)
 0.118 in (3.00 mm)
 312000 psi
 Test Method ASTM D638

Flexural Strength

Yield, 73°F (23°C)
 0.118 in (3.00 mm)
 9230 psi
 Test Method ASTM D790

Impact

Noched Izod Impact
 73°F(23°C), 0.126 in (3.20 mm), 5.5 ft-lb/in
 73°F(23°C), 0.252 in (6.40 mm), 4.8 ft-lb/in
 Test Method ASTM D256

Hardness

Rockwell Hardness (R-Scale) 108
 Test Method ASTM D785

Thermal

Deflection Temperature Under Load
 264 psi (1.8 MPa), Unanneald 185°F/85°C
 Test Method ASTM D648

Vicat Softening Temperature 203°F/95°C

Test Method ASTM D1525

Flamibility

Flame Rating
 0.0630 in (1.60 mm) HB
 0.0866 in (2.20 mm) HB
 0.126 in (3.20 mm) HB
 Test Method UL 94

RAW MATERIAL DATA

Low Density Polyethylene (LLDPE)

Tensile Strength - 0.20 - 0.40 N/mm²
 Notched Impact Strength -
 No Break KJ/m²
 Thermal Coefficient of expansion -
 100 - 220 x 10⁻⁶
 Max Cont Use Temp - 65°C
 Density - 0.915 - 0.930 g/cm³
 Flexural Modulus - 0.35 GPa
 Strain at Yield - 20%
 Flammability UL94 - HB
 HDT at 0.45MPa - 45°C
 HDT at 1.80 MPa - 37°C

Nylon

NFM 10x7.5 -
 OD Tol's +0.03/-0.09mm
 Burst Pressure 995 PSI / 68 bar
 Bend Radius 40mm
 Weight/30m 1.08kgs

NEM 10x8 -

OD Tol's +0.02/-0.10mm
 Burst Pressure 772 PSI / 53 bar
 Bend Radius 50mm
 Weight/30m 0.87kgs

Temperature Range -

-40°C to +70°C, Occasional use up to
 +130°C, Brittle point: -70°C

Technical information for use as
 a guide only.

Pressure values given are based on
 the short term burst pressure at 20°C
 based on a 3:1 safety factor.
 Any increase in temperature above
 20°C will result in a decline in working
 pressure values.

Products and specifications are subject
 to improvements and change without
 notice.

Bisson Ltd
 Unit 11, Eldonwall Trading Estate,
 St.Phillips, Bristol, BS4 3QQ

Tel: 0117-967-9999
 Fax: 0117-961-9261
<http://www.abspipesandfittings.co.uk>