

CONICAL E/C SAMPLING KIT

(WHPVC019C-EC - 25mm)



BISSON
THE PIPE FITTINGS EXPERTS

This Component is used when sampling in a chilled or cold store Environment. The capillary end cap is fed to one end of the pipe run, followed by a 2 meters of capillary 10mm OD nylon tube which links to the conical sampling head which is specially designed to operate in a chilled or cold stores. If ice were to form on the sampling head it forms on the beak, and does not cover the sampling hole allowing the system to continue to function normally.



Installation Instructions:

Use the correct solvent Plusbond 3019. Do not paint. Keep pipe clean and free from dust. Do not install in direct sunlight. Only install with approved pipe. Do not use solvents to clean, only soapy water.

PART NO.:
WHPVC019C-EC
- 25

FITTINGS
COLOUR:
White

DIAMETER
TOLERANCE:
+ / - 0.15mm

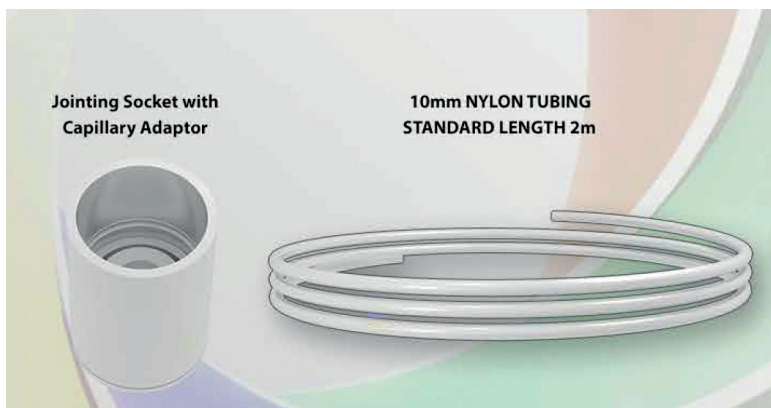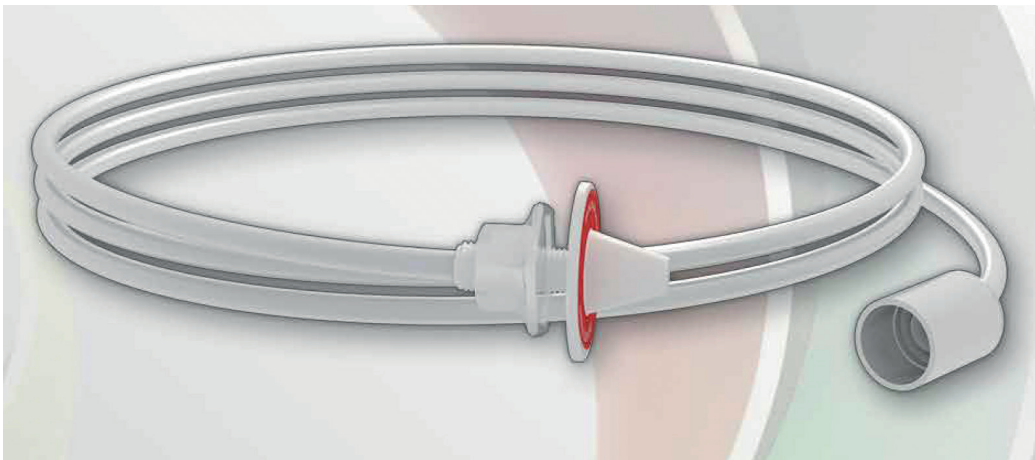

Jointing Socket with
Capillary Adaptor

10mm NYLON TUBING
STANDARD LENGTH 2m

ABS019C/HO CONICAL HEAD
M16 Plastic NUT



RAW MATERIAL DATA

Physical

Specific Gravity:
Test Method ASTM D792

Melt Mass - Flow Rate (MFR)

200C/5.0Kg 2.6g/10 min
220C/10Kg 33g/10min
Test Method ASTM D1238

Moulding Shrinkage

Flow 0.0040 to 0.0070 in/in
Test Method ASTM D955

Mechanical

Tensile Strength
Yield 5510psi 0.118 in (3.00mm)
Tensile Elongation: 22%
Break 0.118 IN (3.00mm)
Test Method ASTM D638

Flexural Modulus

284000psi 0.236 in (6.00mm)
Test Method ASTM D790

Flexural Strength

8390psi 0.236 in (6.00mm)
Test Method ASTM D790

Impact

Notched IZOD Impact
73F (23C) 0.118 in (3.00mm)
4.6ft-lb/in
73F (23C) 0.236 in (6.00mm)
3.3ft-lb/in
Test Method ASTM D256

Hardness

Rockwell Hardness (R-Scale)
103
Test Method ASTM D785

Thermal

Deflection Temperature
Under Load 264psi (1.8 MPa)
Unannealed 181/83t
Viscal Softening Temperature
214/101t
Test Method ASTM D1525

Flamability

Flame Rating
0.0630 in 1.60mm HB
Test Method UL94

