



DISCRETE HEAD

(ABS-020-HO)

A non-intrusive sampling point.

Installation Instructions:

Do not paint.

Keep pipe clean and free from dust.

Do not install in direct sunlight.

Only install with approved pipe.

Do not use solvents to clean,
only soapy water.

Part No.


ABS-020-HO

Fitting colour

OPAQUE

Diameter Tolerance

+/- 0.15mm

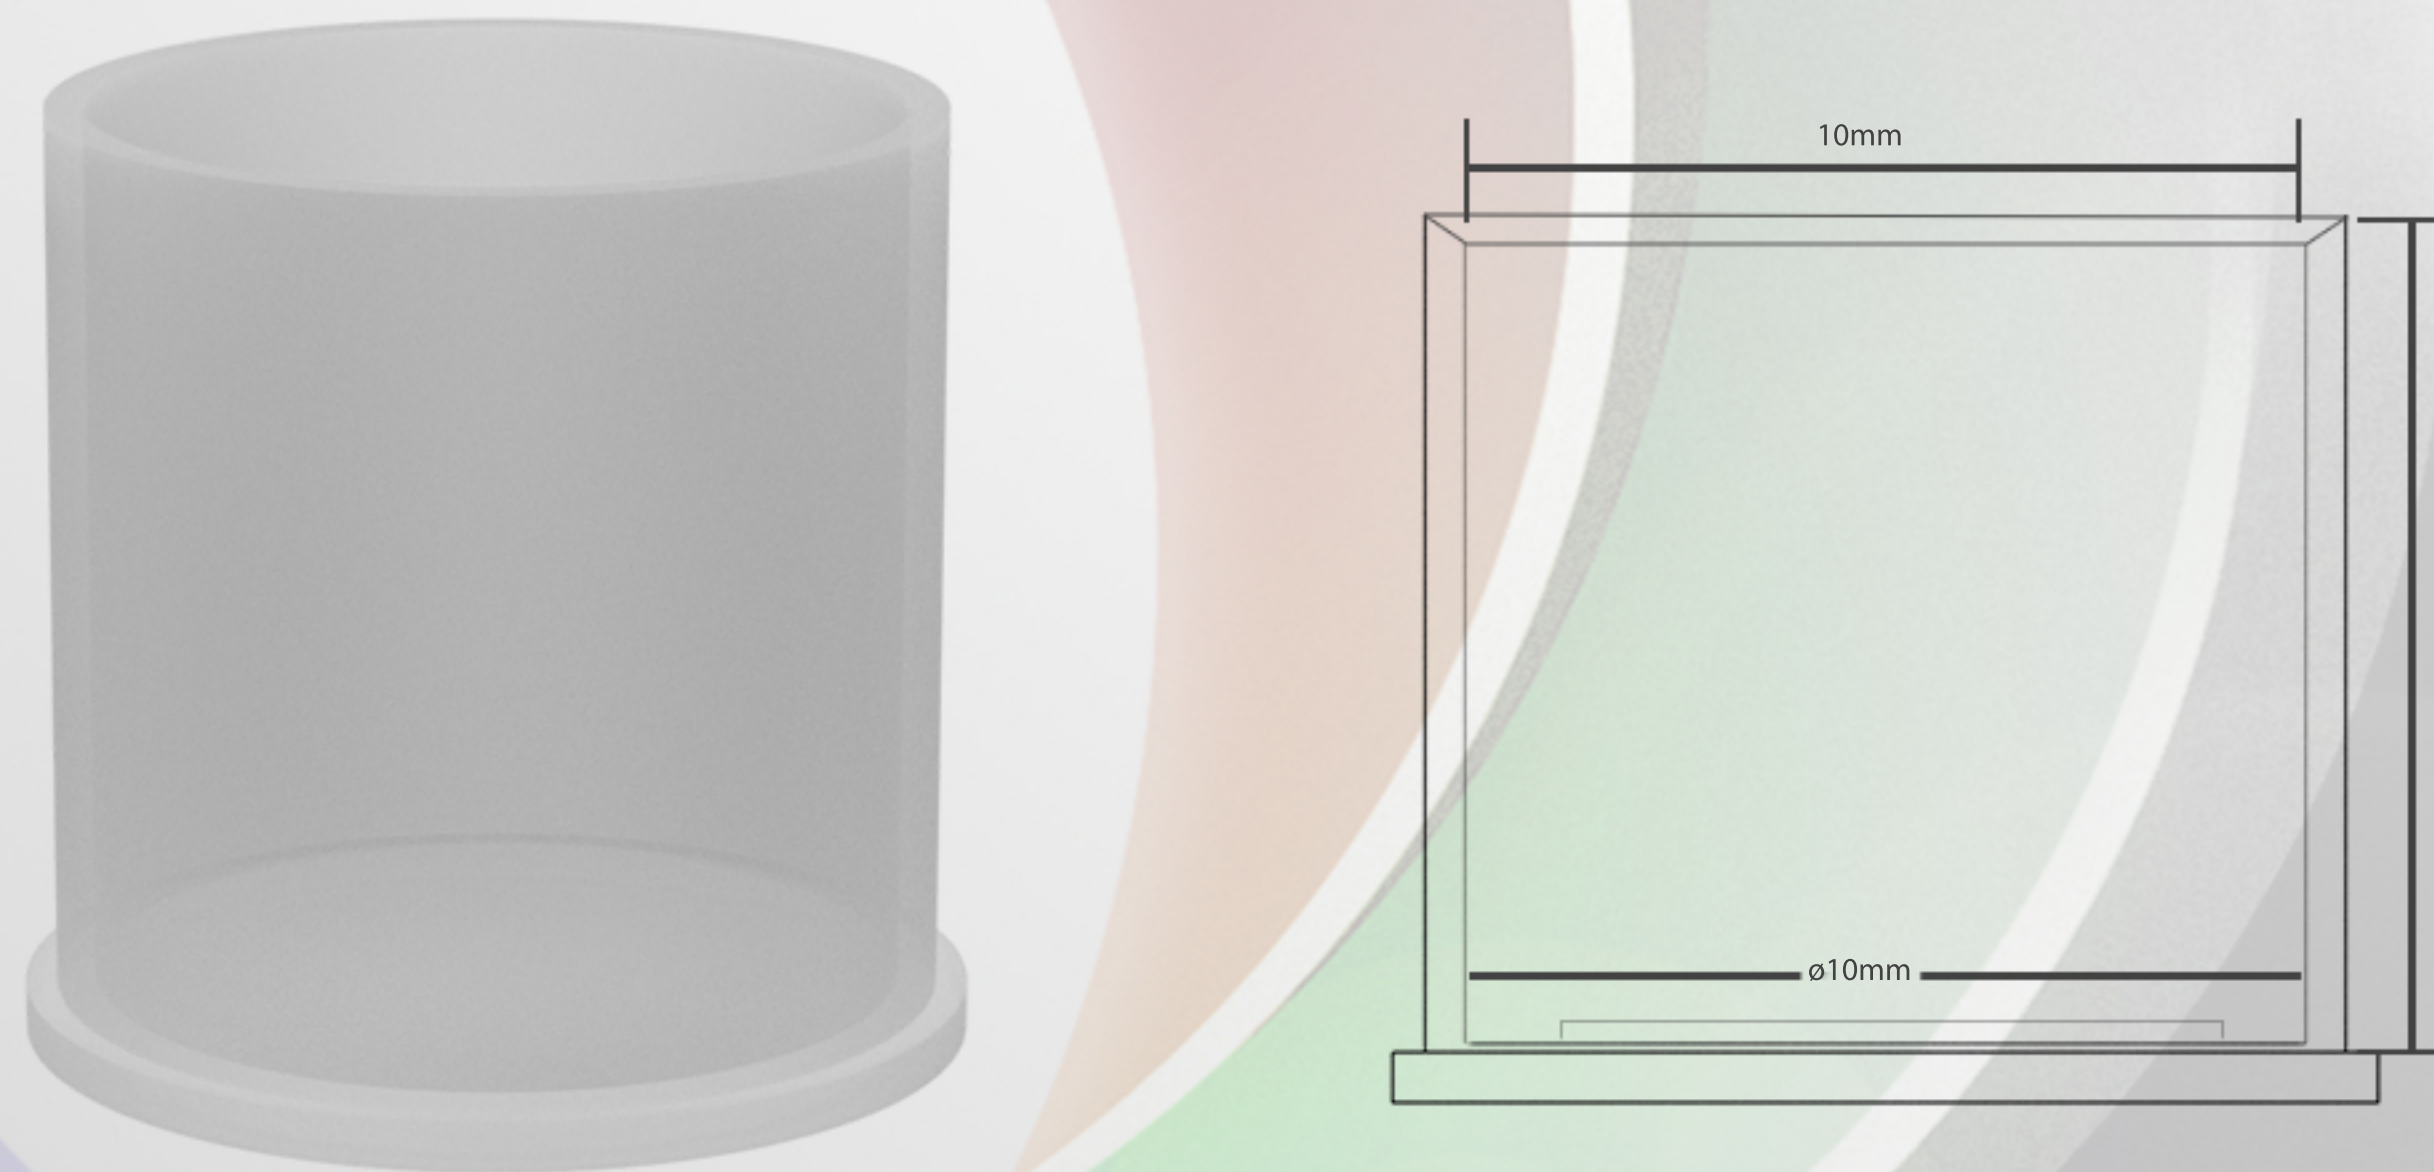

RAW MATERIAL DATA

Low Density Polyethylene (LLDPE)

Tensile Strength - 0.20 - 0.40 N/mm²

Notched Impact Strength -

No Break KJ/m²

Thermal Coefficient of expansion -

100 - 220 x 10⁻⁶

Max Cont Use Temp - 65°C

Density - 0.915 - 0.930 g/cm³

Flexural Modulus - 0.35 GPa

Strain at Yield - 20%

Flammability UL94 - HB

HDT at 0.45MPa - 45°C

HDT at 1.80 MPa - 37°C

Bisson Ltd

Unit 11, Eldonwall Trading Estate,
St.Phillips, Bristol, BS4 3QQ

Tel: 0117-967-9999

Fax: 0117-961-9261

<http://www.abspipesandfittings.co.uk>