

# TEST POINT

(PVCGo21-TP - 25mm)



Used when the system has to be periodically tested. Simply remove the protection cap. Test and replace.



## Installation Instructions:

Use the correct solvent Plusbond 3019. Do not paint. Keep pipe clean and free from dust. Only install with approved pipe. Do not use solvents to clean, only soapy water.


**PART NO.:**  
PVCGo21-TP - 25mm

**FITTING COLOR:**  
Grey


**DIAMETER TOLERANCE:**  
+/- 0.15mm

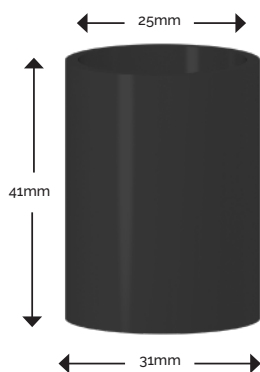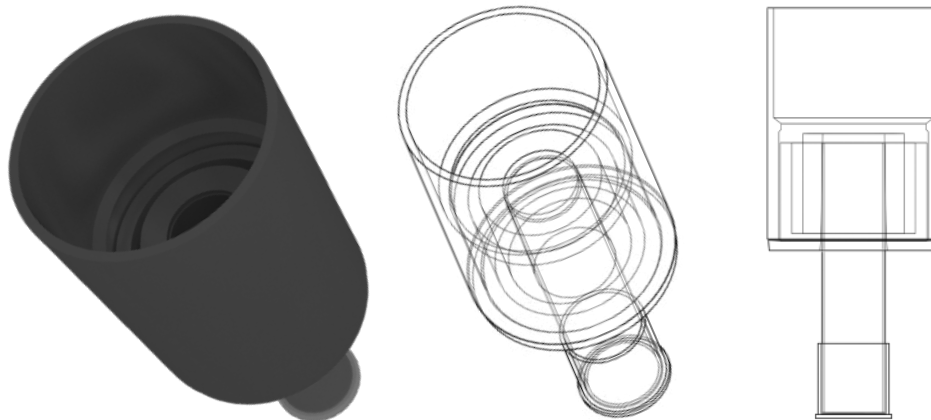


JOINTING SOCKET

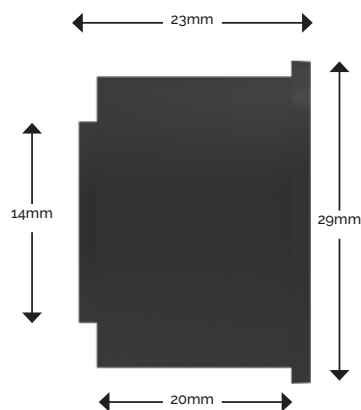

CAPILLARY ADAPTOR

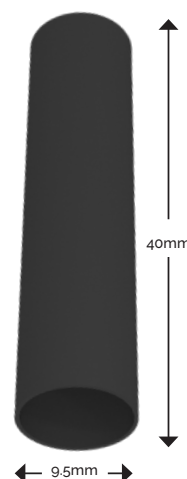

NYLON TUBE



PROTECTION CAP

