

# TEST POINT

(ABS021-TP - 25mm)



**BISSON**  
THE PIPE FITTINGS EXPERTS

Used when the system has to be periodically tested. Simply remove the protection cap. Test and replace.




## Installation Instructions:

Use the correct solvent Plusbond 3019. Do not paint. Keep pipe clean and free from dust. Do not install in direct sunlight. Only install with approved pipe. Do not use solvents to clean, only soapy water.


**PART NO.:**  
ABS021-TP - 25mm

**FITTING COLOR:** Red


**DIAMETER TOLERANCE:**  
+/- 0.15mm

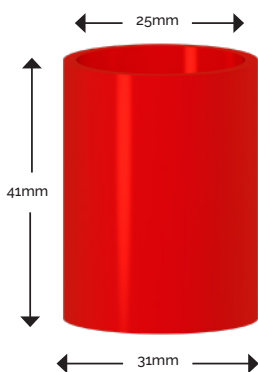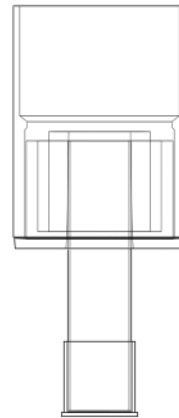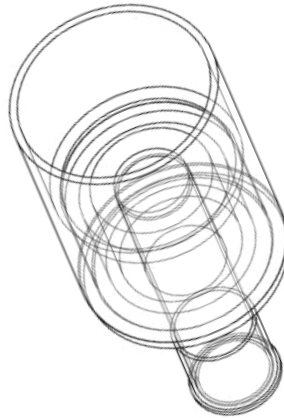


JOINTING SOCKET

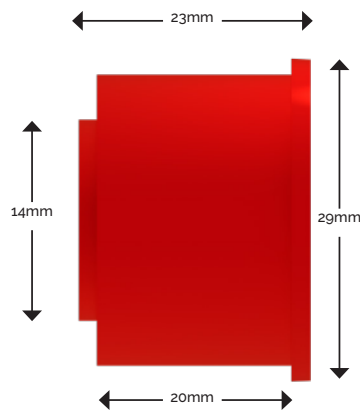

CAPILLARY ADAPTOR

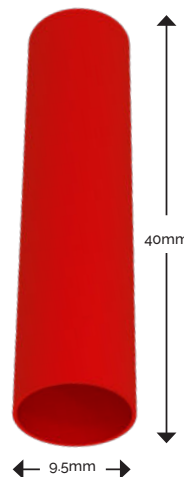

NYLON TUBE



PROTECTION CAP

