

FLUSH E/C SAMPLING KIT

(ABSLG019F-EC - 25mm)



BISSON
THE PIPE FITTINGS EXPERTS

This component is used when it is necessary to sample through a suspended ceiling. The capillary end cap fits onto the end of the pipe run. There is then a 2 meter 10mm OD nylon tube which links into the flush sampling head, which is fed by a nylon nut/washer to the ceiling tile.


Installation Instructions:

Use the correct solvent Plusbond 3019. Do not paint. Keep pipe clean and free from dust. Do not install in direct sunlight. Only install with approved pipe. Do not use solvents to clean, only soapy water.

PART NO.:
ABSLG019F-EC - 25

FITTINGS COLOUR:
Light Grey

DIAMETER TOLERANCE:
+ / - 0.15mm

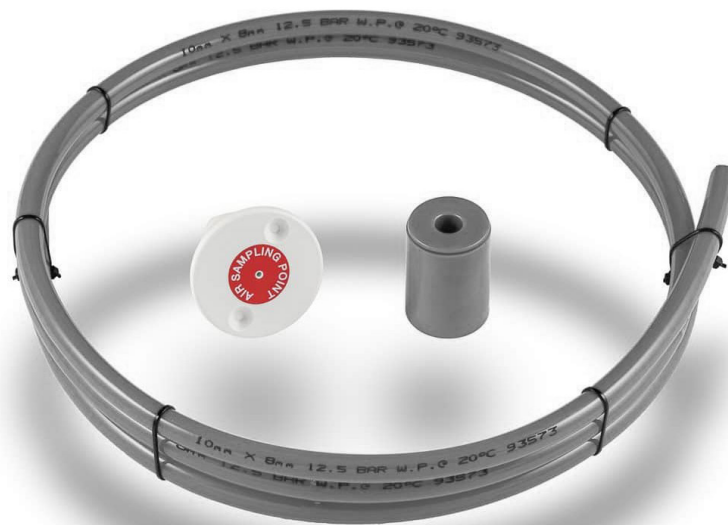

**JOINTING SOCKET WITH
CAPILLARY ADAPTOR**



**10MM NYLON TUBING
STANDARD LENGTH 2M**



**ABS019F/HO FLUSH HEAD
M16 Plastic NUT**

