

# FLEXIBLE BEND 1M

(ABSLG031 - 25mm)



Soft PVC hose with embedded steel wire reinforcement. Very flexible, strong, abrasion resistant, smooth inside and outside.

## Installation Instructions:

Do not paint. Keep pipe clean and free from dust. Do not install in direct sunlight. Only install with approved pipe. Do not use solvents to clean, only soapy water.


Temperature range -20°C to 70°C.

**PART NO.:**  
ABSLG031 - 25mm


**FITTINGS COLOUR:**  
Light Grey

**PIPE COLOUR:**  
Transparent

**DIAMETER TOLERANCE:**  
+ / - 0.15mm'

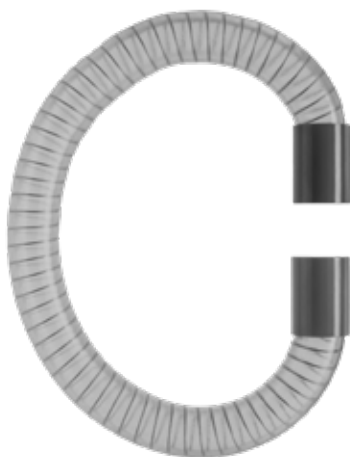

Jointing Socket Side Elevation

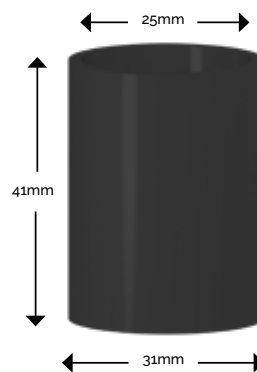

Jointing Socket Front Elevation

