



# FLUSH HEAD WITH JETS

## (PPHT2)

Sold either as part of the flush sampling kit (ABS019F) or individually, it is used when sampling is required through a ceiling tile.

It is the perfect solution when differing hole sizes are required in the same pipe run.

The head features a standard 10mm central hole, into which can be inserted a choice of 8 jets with different sizes of sampling hole including:

2.0/2.5/3.0/3.5/4.0/4.5/5.0/5.5/6.0mm

The required size jet is simply twisted off the strip and push fit into the head (no cement required)


### Installation Instructions:

A 15mm hole is required in the ceiling tile, the head is then secured to the ceiling with the nut/washer (supplied) or with 2x6mm screws (not supplied).

The 10mm connecting nylon tubing is then pushed into the sampling head from the rear. The locating for the tubing is concentric, therefore pushing the tubing firmly home ensures a secure and airtight fit.

Do not paint, Only install with Bisson pipe,  
Do not obstruct the sampling holes.

Part No.	PPHT2
Jets color	RED
Sticker Text	“Air Sampling Point”
Diameter Tolerance	+/- 0.15mm

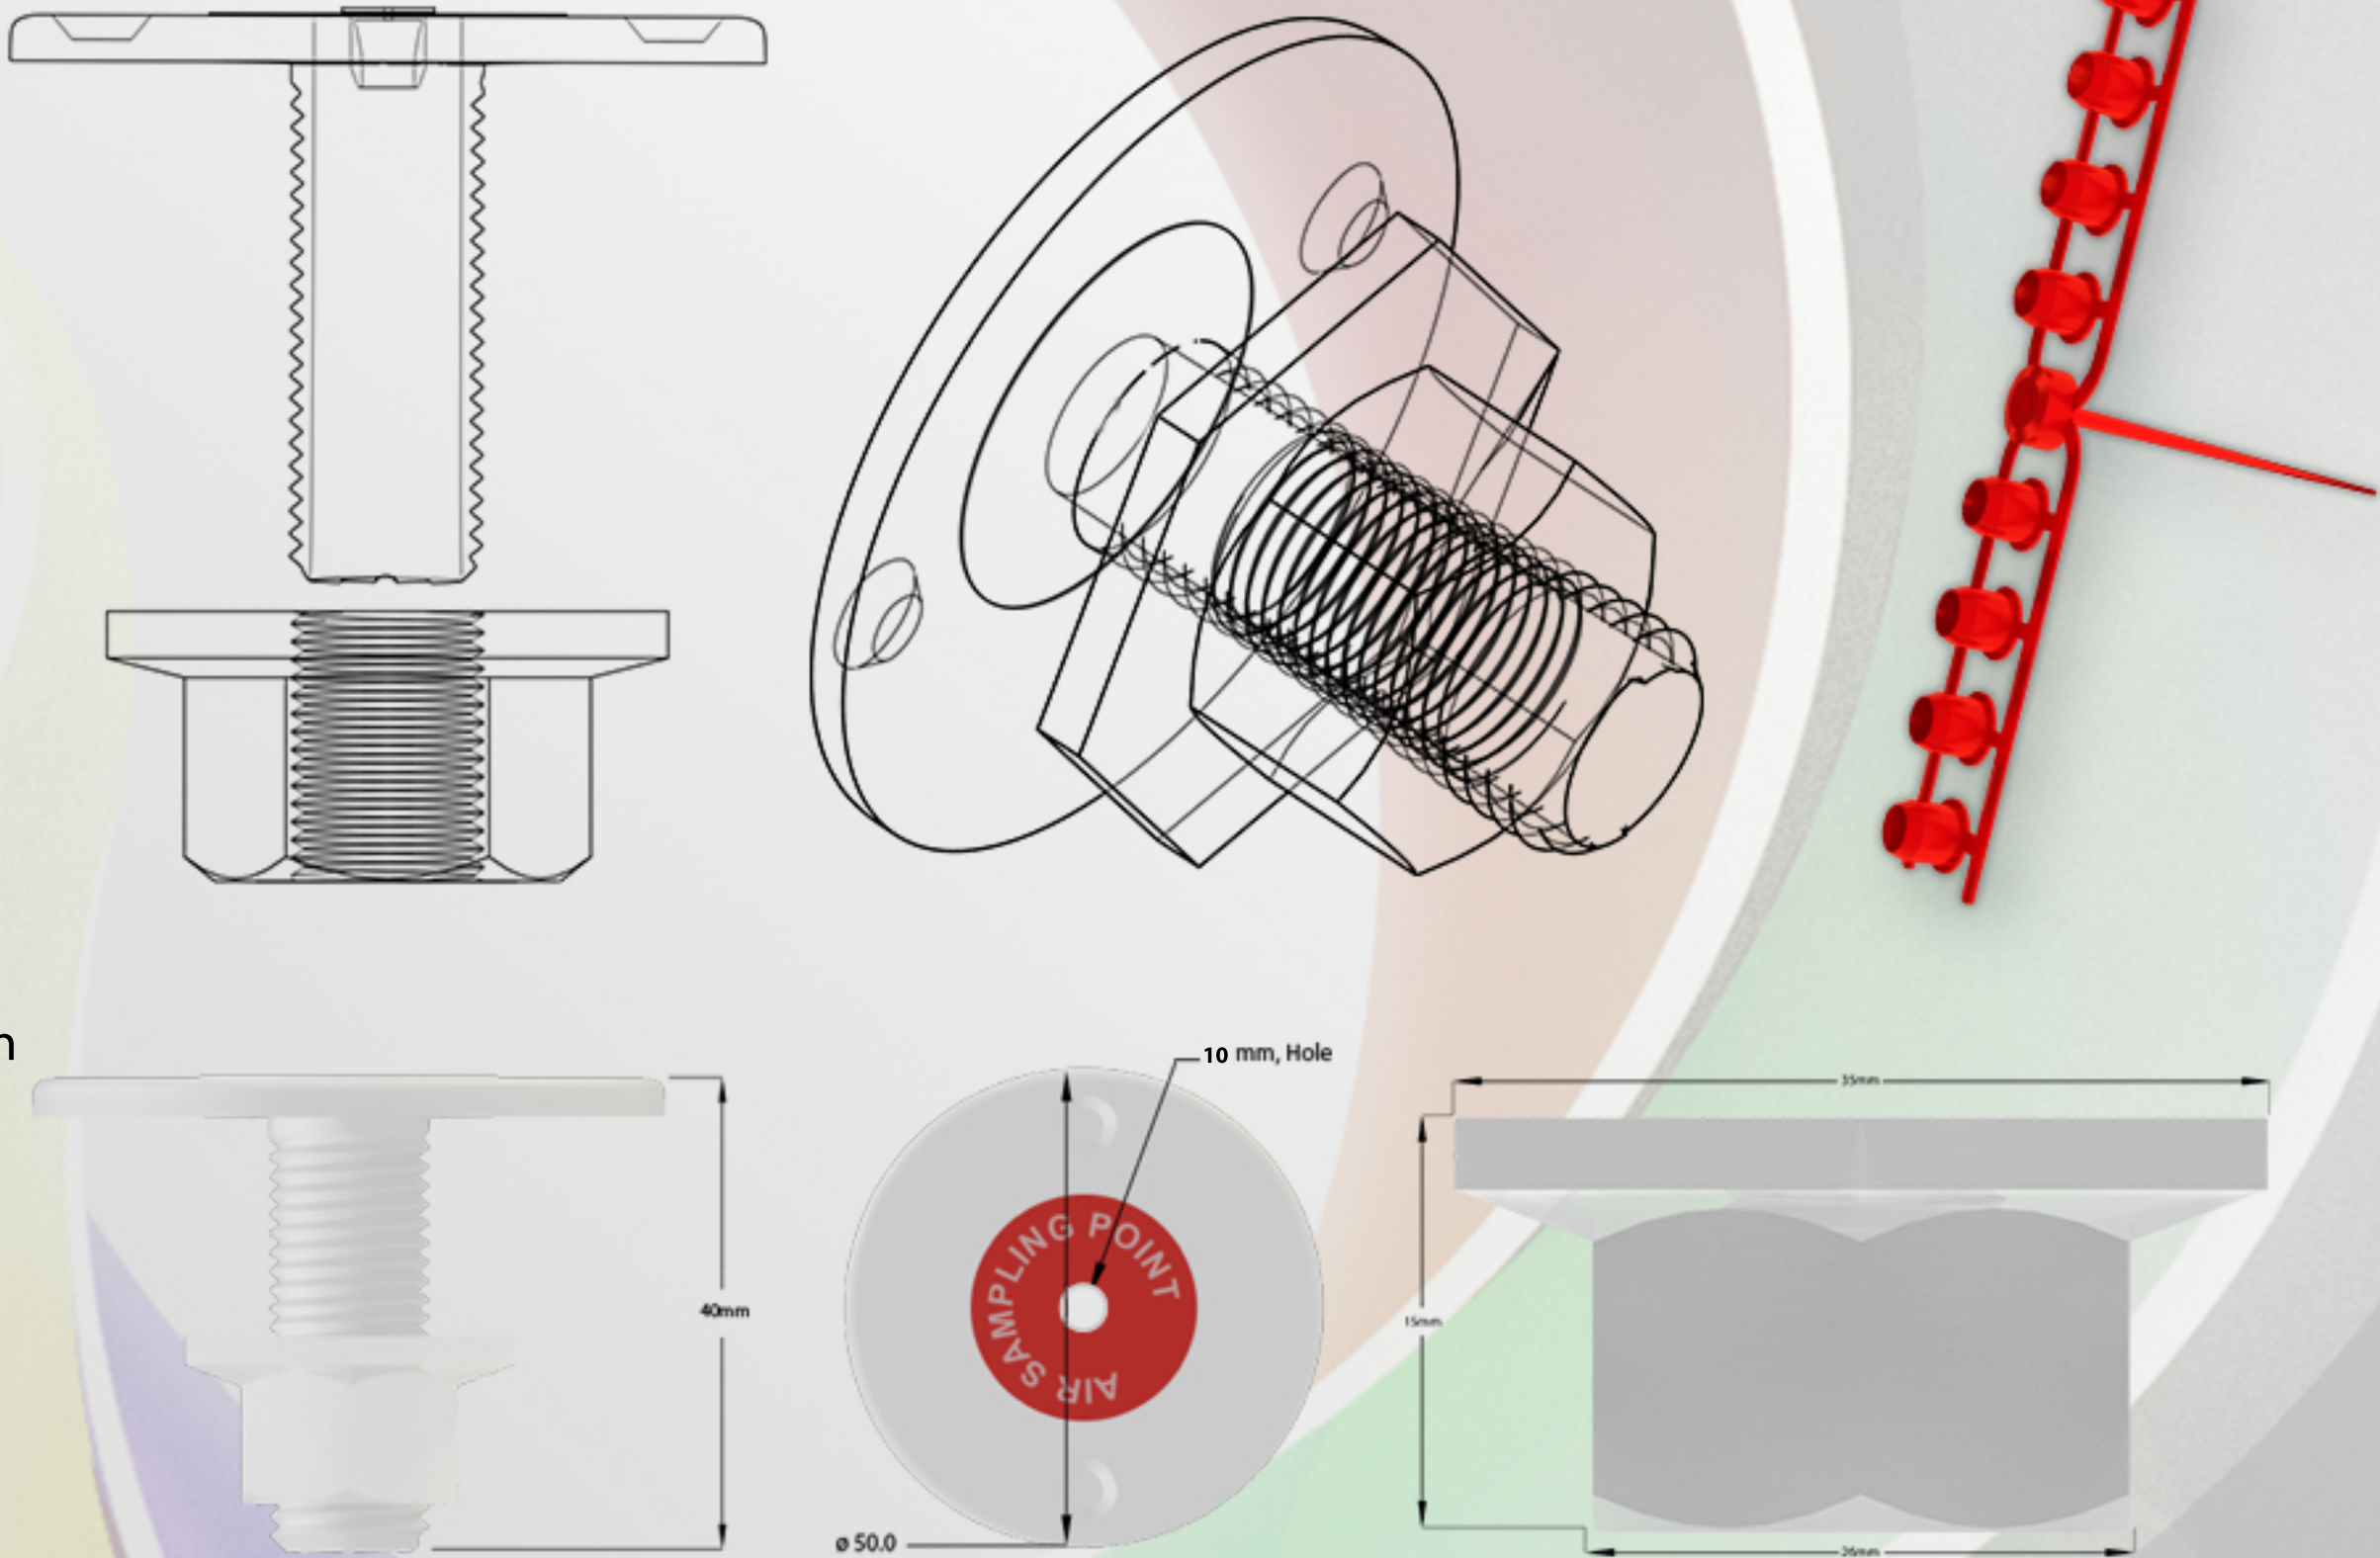

### RAW MATERIAL DATA

**Kumho ABS 750**  
**Acrylonitrile Butadiene Styrene**

**Pysical:**  
Specific Gravity 1.04  
Test Method ASTM D792

Melt Mass - Flow Rate (MFR)  
200°C/21.6 kg 47 g/10 min  
200°C/5.0 kg 4.1 g/10 min  
220°C/10.0 kg 34 g/10 min  
Test Method ASTM D1238

Molding Shrinkage -  
Flow 0.0040 to 0.0070 in/in  
Test Method ASTM D955

**Mechanical:**  
Tensile Strength  
Yield, 73°F (23°C)  
1.97 in (50.0mm)  
6670 psi  
Test Method ASTM D638

**Tensile Elongation**  
Yield, 73°F (23°C)  
1.97 in (50.0 mm), 15%  
Test Method ASTM D638

**Flexural Modulus**  
Yield, 73°F (23°C)  
0.118 in (3.00 mm)  
312000 psi  
Test Method ASTM D638

**Flexural Strength**  
Yield, 73°F (23°C)  
0.118 in (3.00 mm)  
9230 psi  
Test Method ASTM D790

**Impact**  
Notched Izod Impact  
73°F(23°C), 0.126 in (3.20 mm), 5.5 ft-lb/in  
73°F(23°C), 0.252 in (6.40 mm), 4.8 ft-lb/in  
Test Method ASTM D256

**Hardness**  
Rockwell Hardness (R-Scale) 108  
Test Method ASTM D785

**Thermal**  
Deflection Temperature Under Load  
264 psi (1.8 MPa), Unanneald 185°F/85°C  
Test Method ASTM D648

Vicat Softening Temperature 203°F/95°C  
Test Method ASTM D1525

**Flamibility**  
Flame Rating  
0.0630 in (1.60 mm) HB  
0.0866 in (2.20 mm) HB  
0.126 in (3.20 mm) HB  
Test Method UL 94

### RAW MATERIAL DATA

**Nylon**  
NFM 10x7.5 -  
OD Tol's +0.03/-0.09mm  
Burst Pressure 995 PSI / 68 bar  
Bend Radius 40mm  
Weight/30m 1.08kgs

NEM 10x8 -  
OD Tol's +0.02/-0.10mm  
Burst Pressure 772 PSI / 53 bar  
Bend Radius 50mm  
Weight/30m 0.87kgs

Temperature Range -  
-40°C to +70°C, Occasional use up to  
+130°C, Brittle point: -70°C

Technical information for use as  
a guide only.

Pressure values given are based on  
the short term burst pressure at 20°C  
based on a 3:1 safety factor.  
Any increase in temperature above  
20°C will result in a decline in working  
pressure values.

Products and specifications are subject  
to improvements and change without  
notice.

**Bisson Ltd**  
Unit 11, Eldonwall Trading Estate,  
St.Phillips, Bristol, BS4 3QQ

Tel: 0117-967-9999  
Fax: 0117-961-9261  
<http://www.abspipesandfittings.co.uk>